

# FlexyLIFT MR & MRL Hydraulic Lift



**KLEEMANN™**  
Η Νο1 Εταιρία Ανεκυστήρων στην Ελλάδα

## FlexyLIFT: Your flexible hydraulic solution!

FlexyLIFT means:


Flexible dimensions, ideal for any building with pit and headroom limitations for rated load from 450kg to 1000kg.

Flexible machine room location: No machine room at all for FlexyLIFT MRL, and a minimum requirement for a small cabinet -it contains the power unit and the controller- and almost no need for pit depth for the FlexyLIFT MR.

Flexible, state of the art, environment friendly, hydraulic solution by KLEEMANN, Your 1st Choice in Lifts.

### Features / Advantages

- Minimum requirements for shaft pit dimensions: 350mm for FlexyLIFT MR and 900mm for FlexyLIFT MRL
- Minimum requirements for headroom dimensions: 2600mm
- High quality electronic valve at the power unit (C-LRV)
- Extra devices to ensure installer's safety when operating in the shaft pit or on the top of the cabin.
- Telescopic toeguard with electric sensor
- Exceptional leveling accuracy (max  $\pm 3$ mm) and very smooth ride
- Automatic emergency evacuation
- Guaranteed compatibility of all components
- Detailed installation, operation and maintenance manual available
- Can be supplied with «self supporting» steel structure
- Type Examination Certificate according to Directive 95/16 EC
- Optional KIT with environment friendly features (biodegradable oil, low energy LED lights and energy saving controller)
- Technical support and guarantee by KLEEMANN

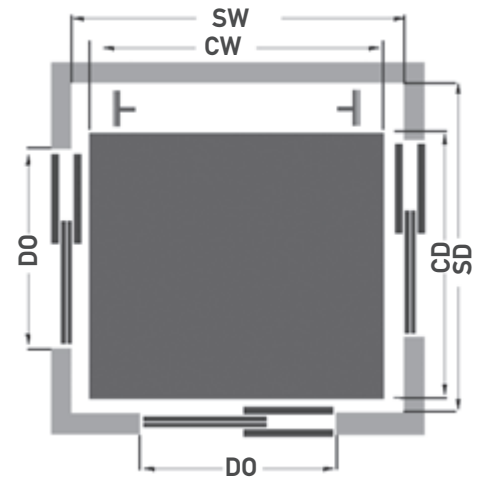

	FlexyLIFT MR (power unit and controller inside a small cabinet)						FlexyLIFT MRL (machine room less)																							
	I			II			I			II																				
Max Rated load [kg]	450			630			1000			450			630			1000														
Persons	6			8			13			6			8			13														
Landing/Car doors	Fully automatic, 2-panel side opening																													
<b>SW:</b> Shaft Width [mm]	1450			1550			1725			1600			1765			1450			1550			1725			1600			1775		
<b>SD:</b> Shaft Depth [mm]	1625			1775			1950			2475			2650			1625			1775			1950			2475			2650		
<b>DO:</b> Door opening [mm]	800			800 or 900						800			800 or 900																	
<b>CW x CD:</b> Car width x Car depth [mm]	1000 x 1250			1100 x 1400			1100 x 2100 *			1000 x 1250			1100 x 1400			1100 x 2100 *														
Max operating speed [m/sec]	1.0																													
Max travel height [m]	25			22			30			25			22			30														
Max number of landings	11																													
Min Pit depth [mm]	350			350			400			900			900			1000														
Min Headroom [mm]	2600 **																													

\* Also available for 1400 x 1600mm car dimensions (SW: 1 or 2 doors 1900mm, 3 doors 2065mm, SD: 1 door 2000mm, 2 or 3 doors 2150mm)

\*\* For 2000mm clear door height

KL2 FLEXYLIFT ENG 09/09